



Cup & Bottle Assemblies

INSTRUCTIONS AND REPLACEMENT PARTS

Screw Cover Siphon Jar Assemblies:


Jar Assemblies are used for quick change of colors on jobs where materials are used in small quantities. Paasche offers containers of many sizes for a wide variety of uses.

- AUB, AUT & A-JU Spray Guns have 1/4" Fluid Connection.
- BUB, CU & KRS have 3/8" Fluid Connections.

AUB & AUT SPRAY GUNS with 1/4" Fluid Inlet:

43SCJ 3 OUNCE SIPHON JAR ASSEMBLY-3 oz. (89cc)


- | | | |
|-----|----------|----------------------|
| 10. | N-1/4 | Nut Plated |
| 11. | U-3637 | Tube & Neck Assembly |
| 12. | U-3226 | Locknut (2) |
| 13. | U-3389 | Flange (2) |
| 14. | U-3390-1 | Cover |
| 15. | 3-JG | Gasket |
| 16. | U-3638 | Polyethylene Tube |
| 17. | H-108 | 3 Ounce Jar |

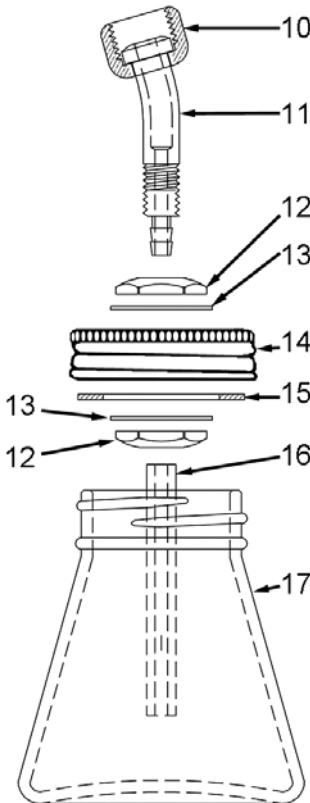

WARNING: Spray materials may be harmful if inhaled or allowed to come into contact with the skin or eyes. Consult the product label and Material Safety Data Sheet supplied for the spray material. Follow all safety precautions. **CAUTION:** Well Ventilated Area Required to remove fumes, dust or overspray. **Siphon Jars (Glass) must never be pressurized. Pressure feed Cup Assemblies (Aluminum) must never exceed 25 P.S.I.**


27SC 3 OUNCE GRAVITY CUP ASSEMBLY. 3 oz. (89cc)

No.	Part Number	Description
9.	UB-255	Cover
10.	4-G	Gasket
11.	27SCC	3 Ounce Cup (only)

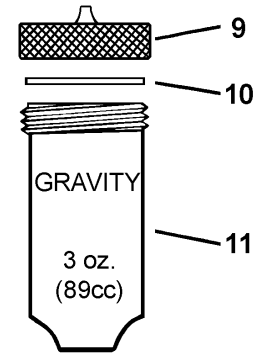

28SC HALF PINT GRAVITY CUP ASSEMBLY. 8 oz. (.237 l)

No.	Part Number	Description
1.	U-2097A	Cover
2.	3-GT	Gasket
3.	28SCC	Half Pint Cup and Boss

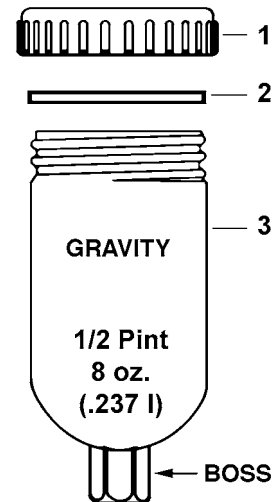



The Assembly with Polyethylene Plastic Container is used in conjunction with Spray Guns as a gravity feed device. It is a practical supply method, with remote location possibilities, allowing freedom of movement for manual operation and convenience of location for Automatic Spray Equipment.

Available in a Quart Container complete with Wall Mounting Bracket. Assembly has a 1/4" male fluid outlet for easy connection to Paasche's HA-1/4 Fluid Hose. Spray Gun end must be 1/4" Coupling for AU & JU Styles and 3/8" Coupling for BU & CU Styles.

WARNING: Spray materials may be harmful if inhaled or allowed to come into contact with the skin or eyes. Consult the product label and Material Safety Data Sheet supplied for the spray material. Follow all safety precautions. **CAUTION:** Well Ventilated Area Required to remove fumes, dust or overspray. Secure fluid hose wrench tight for safety and to prevent leaks.

20-1: Quart Gravity Container Assembly – 32oz. (.946 l)	
1.	U-3074 Cover
2.	U-3016 Qt. Poly Container
3.	U-3647 Fluid Outlet Assembly
11.	HF-1/4 Valve Assembly
12.	UM-71 Mounting Socket
13.	JC-61 Tapered Stud
14.	SM-42 Bracket
15.	1/2"-13J Hex Jam Nut
16.	HF-58 Adapter 3/8" Male Thread 1/4" Female Thread

